
Protectors

PROTW LUX LO

High-performance, solvent-based, and low-odour stain-proof treatment for natural stone and agglomerates.

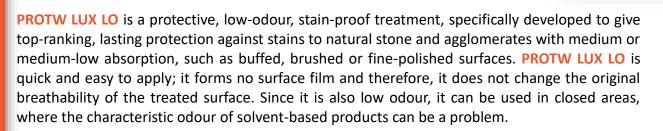

PROTW LUX LO is a neutral product that will not change the colour of the materials to which it is applied, but in some case, it will bring out the colour of surfaces that are more sensitive to changes in tone, due to absorption. It is resistant to UV rays, will not yellow over time and is suitable for use on indoor and outdoor surfaces. **PROTW LUX LO** is also certified for use with foods and therefore, it can be used to apply stain-proof treatment to kitchen worktops.

CHARACTERISTICS AND BENEFITS

- It has pronounced stain-proof properties
- Provides hydro-repellency to the surface
- Provides oleo-repellency to the surface
- Low odour solution
- ✓ Fast drying
- Protects material against dirt and staining
- Adds a high degree of water repellence
- Resistant to UV rays
- Will not yellow over time
- Resistant to the elements
 - Certified for food use

USES

This product **can be used** on both indoor and outdoor surfaces.

Suitable for use on: Marble, granite, limestone, sandstone, slate, basaltina, quartzite, porphyry, travertine, cotto, terracotta, marble-cement agglomerate, marble-resin agglomerate, quartz-resin agglomerate.

COVERAGE

10/15 m²/l

APPLICATION EQUIPMENT

Brush, Lambswool applicator, Roller, Cloth













Protectors

PROTW LUX LO - High-performance, solvent-based, and low-odour stain-proof treatment for natural stone and agglomerates.



APPLICATION STEPS

Preparing and cleaning the surface

- 1. Carefully clean the surface, making sure to remove any dust or dirt present.
- 2. Never apply PROTW LUX LO to wet or damp surfaces
- 3. Apply PROTW LUX LO to surfaces with a temperature of between +5 and +40°C
- 4. Any adjacent surfaces not being treated with the product must be protected.

Application

5. Apply an even, thin coat of product to a clean, dry surface with the preferred tool, making sure to create an even layer to cover the whole surface being treated

6. Following application, the product may leave light surface residues, above all in case it is applied to polished or brushed surfaces. In this case, about 10-15 minutes after application, redistribute any excesses with a dry cloth, cleaning and evening them out until fully removed.

Drying time

The product is fast drying and in any case, within 60 minutes from application.

Opening to floor traffic

The surface can be opened to floor traffic about 2-3 hours after the product has been applied.

COMPLEMENTARY CLEANING AND MAINTENANCE PRODUCTS

- For *routine cleaning* of a surface treated with PROTW LUX LO, we recommend: NEUGEL or ALGAFLOOR

- For *extraordinary cleaning* of a surface treated with PROTW LUX LO, we recommend: FABER 30 or DETERFUG, according to the type of stone to be cleaned

INSTRUCTIONS AND GUIDELINES

- Never apply the product to wet or damp surfaces.
- Do not apply the product to overly heated surfaces.
- Do not apply the product when there is an imminent risk of rain or frost, or in presence of mist, fog or high levels of humidity.
- Apply the product to surfaces with a temperature of between +5 and +35°C
- When applying to recently laid or grouted surfaces, wait for the adhesive or grout to cure completely.
- Before applying the product to the whole surface, it is advisable to test a small, unexposed area or unused piece to check its suitability for use.

EQUIPMENT CLEANING

At the end of application, the equipment used can be washed using white spirit.

SAFETY

When applying the product, always use suitable personal protective equipment and follow the instructions on the product safety data sheet with care.



Pag. 2 di 4

Caber CO 900 QUALITY SYSTEM

Caber SO 1400 ENVIRONMENTAL POLICY

Protectors

PROTW LUX LO - High-performance, solvent-based, and low-odour stain-proof treatment for natural stone and agglomerates.



PHYSICAL AND TECHNICAL INFORMATION	
Aspect	: Liquid
Color	: Colourless
Odour	: Mineral Spirit
Specific gravity (20°C)	: 800 ± 10 g/Lt.
Flashing point (ASTM D 56)	: 23°C open vase

STORAGE

Keep the container tightly closed and store in a cool, dry place.

SHELF LIFE


36 months in the original, sealed packaging, stored in a cool, dry place.

PACKAGING

- 1 l bottles - 12 bottles per box

- 5 l cans – 4 cans per box

HAZARD IDENTIFICATION

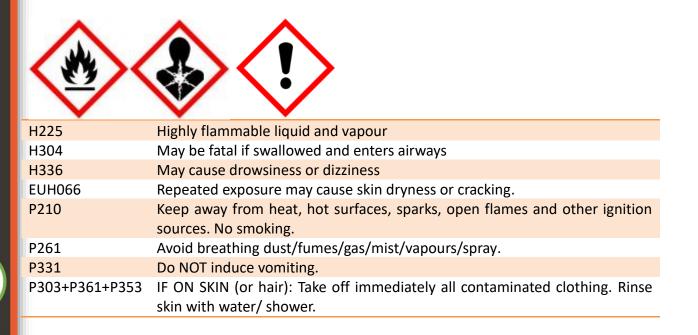

Version 3.0 - 11/07/2016

This technical data sheet supersedes all previous versions. Always refer to the latest version of the data sheet, available on www.fabersurfacecare.com site. Faber Chimica reserves the right to update and / or modify the data and information contained in the data sheet.

The information in this data sheet is based on our wide experience in technical and operational research. In any case you should always make a preliminary test to verify the suitability of the product for the intended use and the type of material on which it will be applied. The information and the suggestions can't be construed as a



(Tabei) 80 900

> OUALITY SYSTEM

(Taben)

SO 1400

ENVIRONMENTAL Policy commitment or result in our responsibility as the conditions and method of use of the product cannot be controlled by us. Therefore Faber Chimica Srl disclaims any liability with regard to the use of such data and suggestions.



LDING

TALIA

(Taber) ISO 9001 QUALITY SYSTEM



 FABER CHIMICA SRL – VIA G.CERESANI, 10 – LOC.CAMPO D'OLMO – 60044 – FABRIANO (AN) – ITALY

 Phone: +39 0732 627178
 Fax: +39 0732 22935
 Email: info@faberchimica.com

LINEA

